



KOALA L I V I N G


Assembly Instruction

Product Name: Minda Brush Gold Glass Chandelier

Hardware List




Parts List

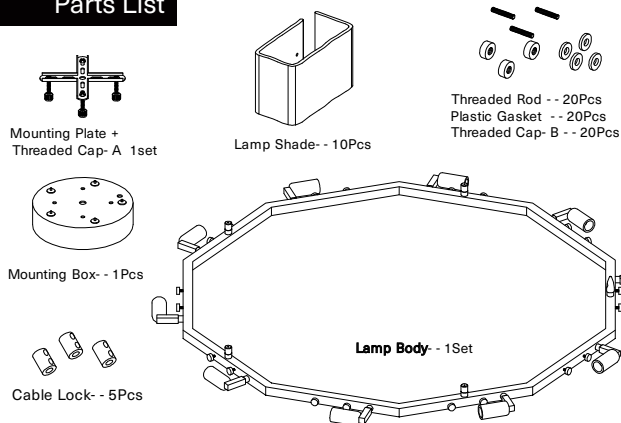

Note


1. Turn off the main power supply before starting the installation.
2. We recommend that installation of this lighting fixture be done by a licensed electrician.
3. Check all parts and read the instructions before installation.
4. Ensure all wire connections are secure and properly insulated.
5. Handle electrical wires and tools with care to avoid damage or injury.
6. Do not restore power until the fixture is fully installed and securely mounted.

1

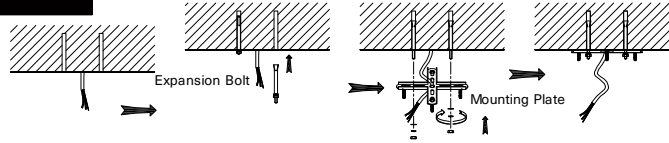


1. This product is heavy(25Kg), Use a drilling machine to drill four hole into a solid ceiling. Insert the expansion bolts into the holes and tighten the nuts firmly.
(Cut away protruding part of the expansion bolt to avoid interference with the mounting box.)
Take off the nuts from the installed expansion bolts. Align the holes of the mounting plate with the expansion bolts, place the mounting plate over them, then reinstall and tighten the nuts securely.

2

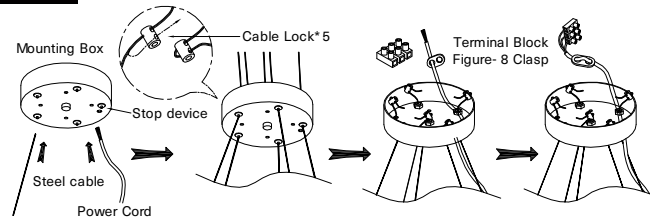


2. Pass the power cord and steel cable through the mounting box, Adjust it to the appropriate installation height, install cable lock / figure-8 clasp and terminal block respectively as shown in the diagram, Until cable lock and figure-8 clasp reaches the bottom of the mounting box, prevent the power cord and steel cable from detaching.

3

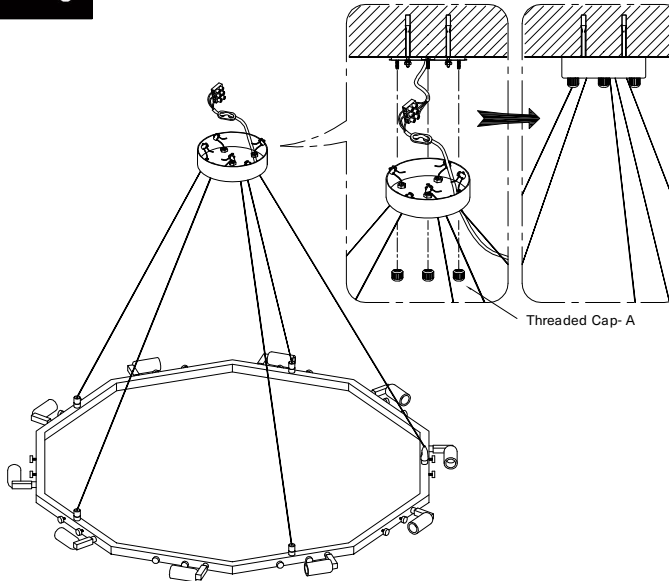


3. Connect the power cord to the terminal block, pass the mounting box through the mounting plate and tighten the threaded cap- a. Adjust the steel cable to level the lamp body.

4

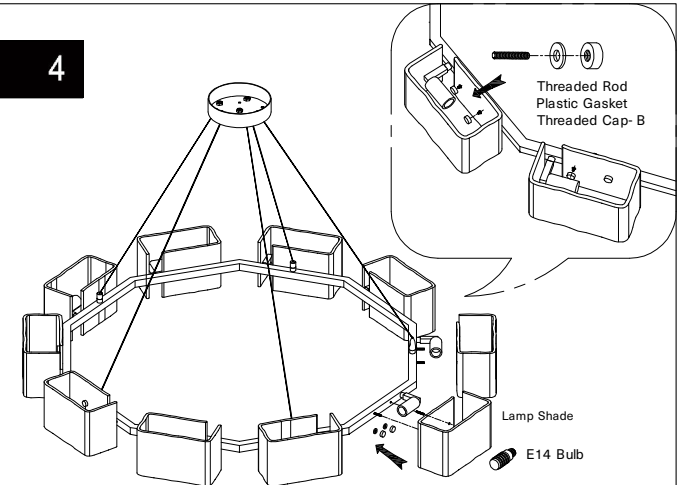

4. Insert the threaded rod into the lamp body, then install the glass shade and the plastic gasket, and fasten them securely with the threaded cap- b. Install bulb into socket.

5

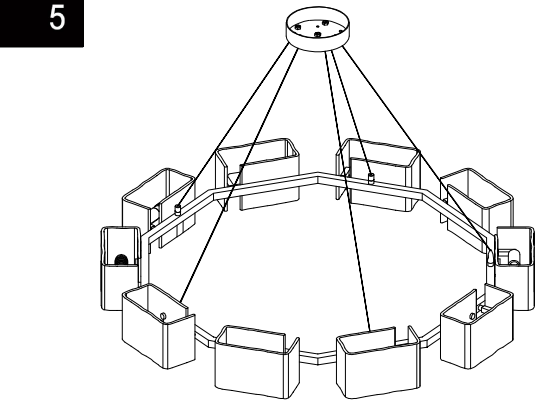

5. Installation completed

Important Safety Instruction

Please select a solid and level surface for mounting. For installation on gypsum board, or decorative ceiling panels, additional reinforcement is required :
Prior to installation, verify that the luminaire functions correctly by performing a test :
Before installing or removing the bulb, please turn off the power :
Do not allow children to touch the lamp holder or bulb. Bulbs that have been on for a long time will be hot to the touch; please do not touch them.

220- 240V a. c, 50Hz E14; Max. 10 $\times$ 25W ta: 25 $^{\circ}\text{C}$

If the external flexible cable or cord this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

